


L
BOOTH

BUSINESS RANGE



SPECIFICATIONS AND THECNICAL SHEET

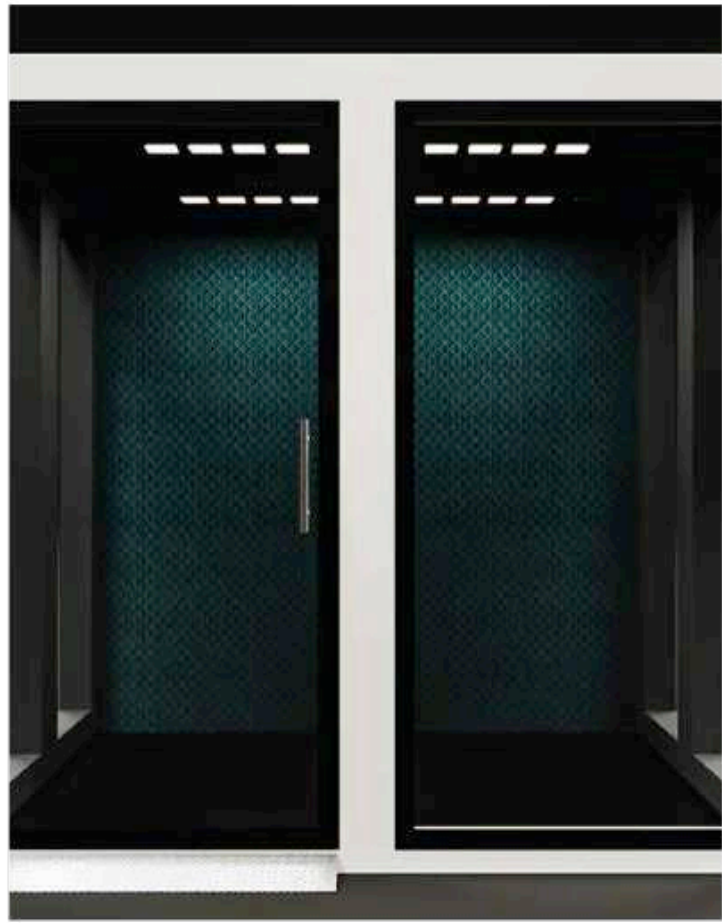

L
BOOTH

Collaborative space - 4 people

Is a smart pods that are hybrid meeting spaces and that can be expanded by adding expansion modules fully connected and totally adapted to the user's needs.



Our "Booth" range office pods can accommodate a wheelchair thanks to their access ramp and can also be equipped with different types of equipment/ furniture for their interiors.

The lighting and ventilation of the "Booth" pods are activated by a motion sensor.



OUR PARTNERS CERTIFICATIONS :



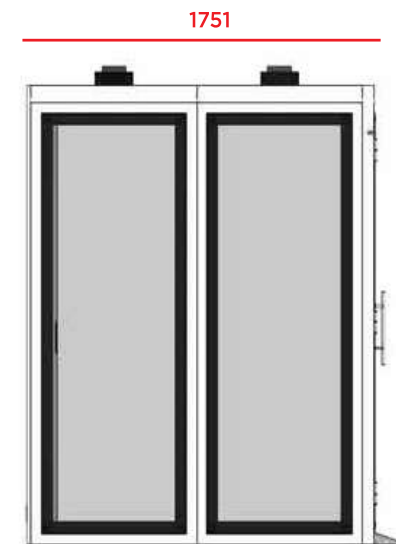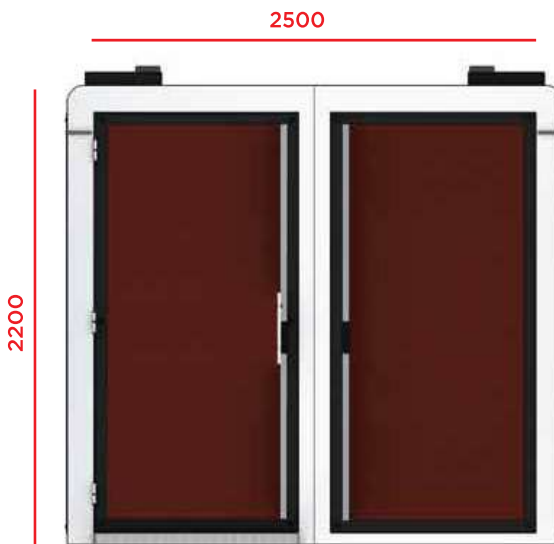

POSSIBLE CONFIGURATIONS:

TWO SIDES SOLID GLASS BACK: CLOSED SOLID BACK

TWO CLOSED SIDES: - SOLID GLASS BACK - SEMI-GLASS BACK

ONE SIDE WITH A FULL GLASS BACK: - FULL GLASS BACK - SEMI-GLASS BACK



**Dimmer
 Light and ventilation**

A 5-speed dimmer switch for light and ventilation is mounted on the central column, allowing you to adjust the intensity of each piece of equipment as you wish. By default, smart pods are equipped with light, ventilation and connectors. They are activated when a person enters the smart pod.

The air inside the smart pod is fully regenerated every minute (intensity adjustable with the dimmer) When the smart pod is no longer occupied, it will remain on and continue to ventilate for 3 minutes to ensure that the air is fully regenerated for the next use. Once these 3 minutes have elapsed, the light and ventilation switch off automatically.

Of course, the smart pod can be occupied directly after the last use without waiting the 3 minutes.


In a BOOTH L smart pod, the recommended time of use is estimated at 1h - 1h30.



Screen 23,6" (optional)



Connectivity:
 2 x 110v + USB A + USB C
 + 1 x RJ45

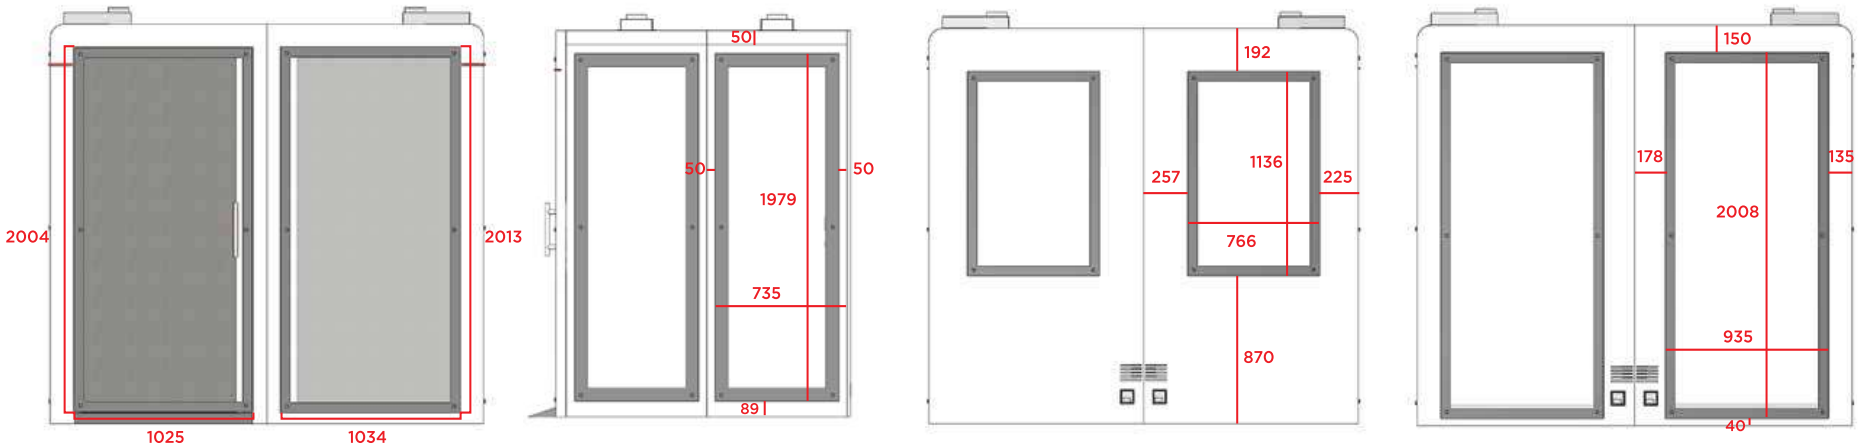


DIMENSIONS	2500mm x 1751mm x 2200mm - Option ARS + 90mm(H)
LENGTH - WIDTH - HEIGHT	
WEIGHT	650kg
ACOUSTICS	Up to 27.5 dB according to ISO 23351-1-2020
VENTILATION	Ultra silent - Fresh air in less than a minute - 385.36 m3/h
OCCUPIED SURFACE	4.38m2
CONNECTIONS	2x110v + 1xUSB A + 1 x USB C + 1 RJ45
SCREEN	23.6" (Option) 1 central screen
ELECTRICAL CONSUMPTION	88.8 w (Standby 12 w)

Booth Technology


Discover our technological systems in the Booth range

Acoustic




Up to **29.5 dbA**
According to ISO 23351-1:2020

Ventilation




Ventilation intensity regulation

Light



Illumination intensity regulation

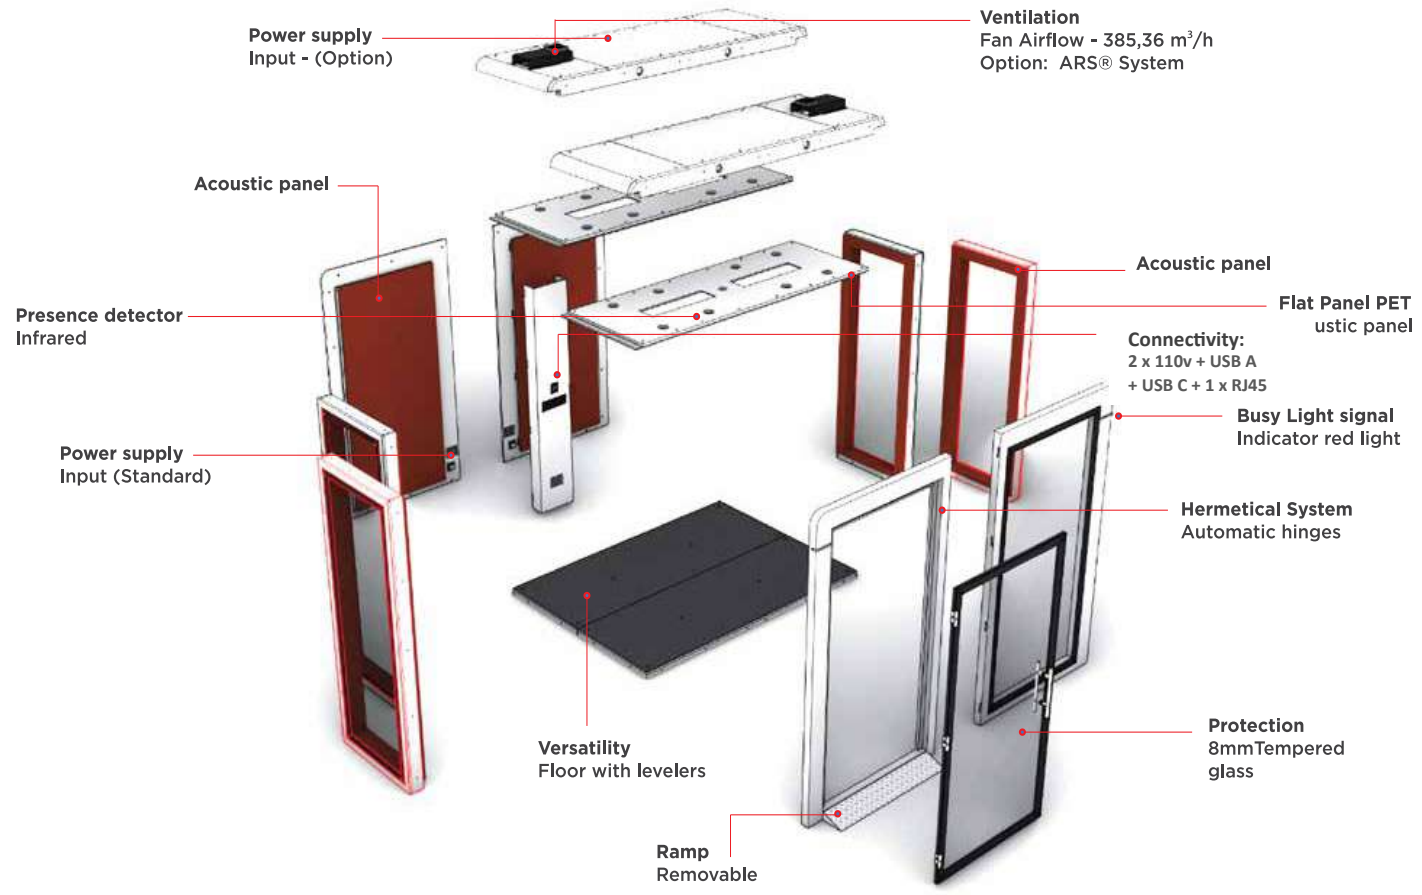



IN

8x Fan - 80mm
Fan Airflow ----385,36 m³/h
Optional
ARS®
(Air Refreshing System)

OUT

1x Fan - 120mm
Fan Airflow ---116,21 m³/h

OUT

2x Fan - 120mm
Fan Airflow ---232,42 m³/h



FAN - 120mm
Specifications:

Dimension -----120x120x25 mm
Fan Airflow -----116,21 m³/h



FAN - 80mm
Specifications:

Dimension -----80x80x25 mm
Fan Airflow -----48,17 m³/h

EASY MEET L BOOTH *by*



NET POSITIVE GROUP

[THINK
INSIDE
THE
POD]

Ph. +1 437 882 9264 - +1 581 3093 1626

CONTACT@ESEDIS-GROUP.COM

WWW.ESEDIS-GROUP.COM



CERTIFIED
ISO 9001



PT008341